



AS-400 Dry Contacts Relay Card

Product Info


The AS-400 Relay Card converts UPS communication signals to potential-free, dry contacts for industrial control. It is designed for internal use with Marathon Power's Vault Series UPS. Dry contact signals and pin-out details for the DB9 Connector are as follows:

Pin #	Description	Input / Output
1	Description UPS fault, relay contact, normally open, active close.	Output
2	Summary alarm, relay contact, normally open, active close. One of the following conditions activate this signal: Battery test failure, Charger failure, Bypass active, Output fault, Bus fault, Inverter fault, Over-temp, Overload.	Output
3	GND for secondary	
4	Remote shutdown	Input
5	Common	
6	Bypass active, normally open, active close	Output
7	Battery low, normally open, active close	Output
8	Spare	
9	AC power failure, normally open, active close	Output

Note: Contacts are rated at 1A, 24VDC or 1A, 120VAC


Vault Series Relay Card Schematic

Default Contact Setting is Normally Closed (NC)

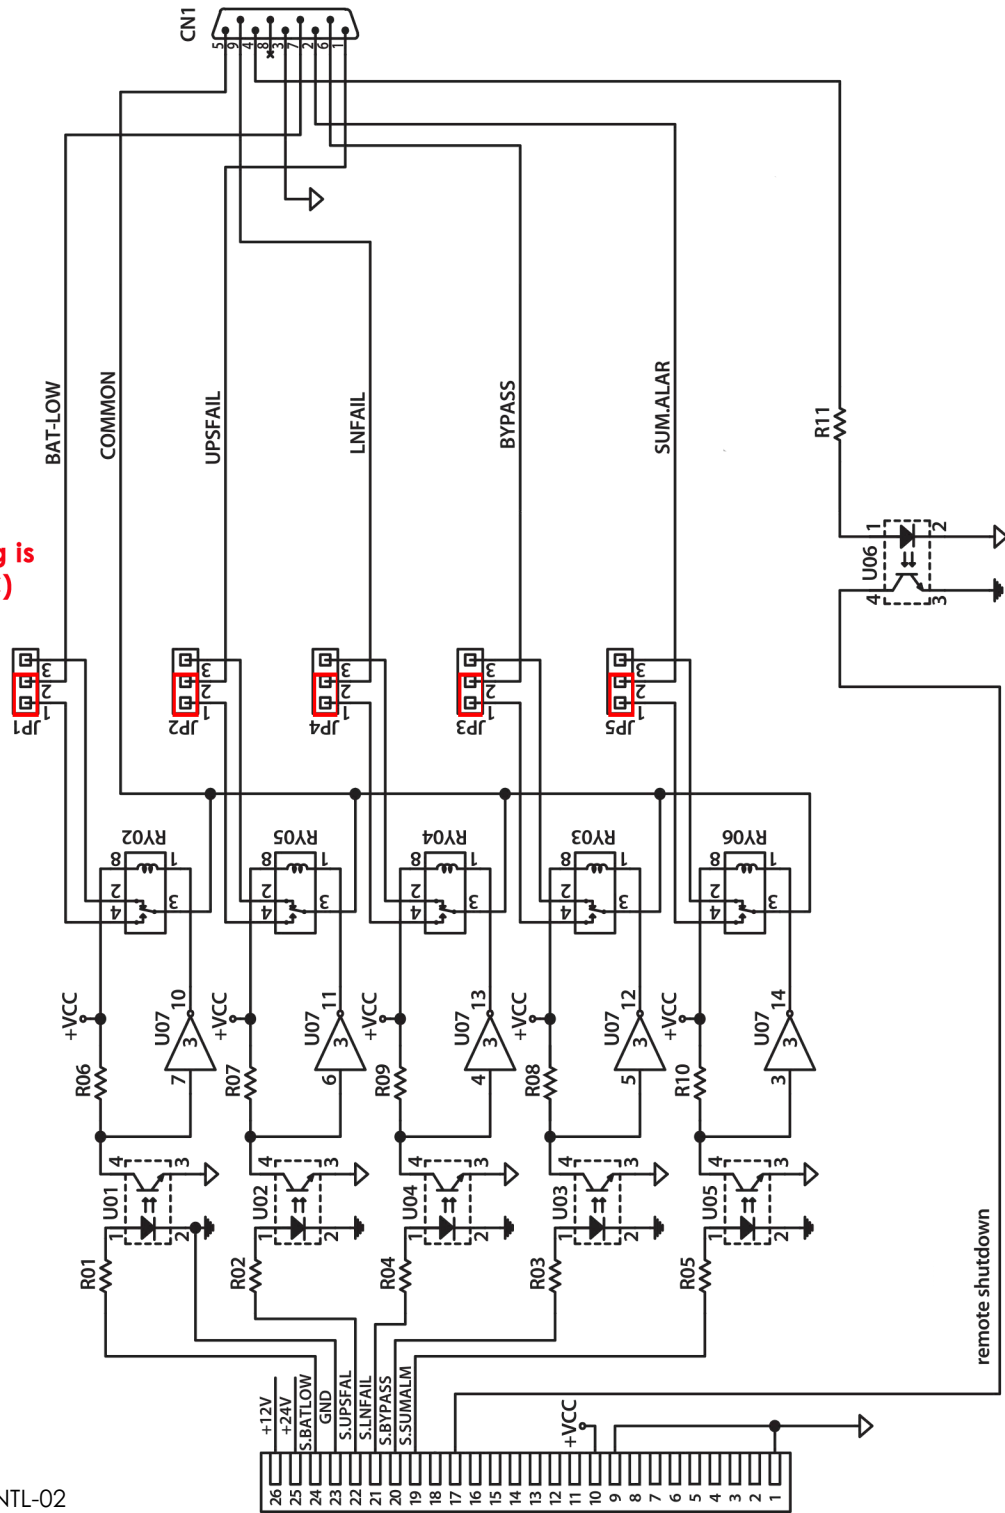

Part# VASR-INTL-02

Vault Series Relay Card Interface Cable (OPTIONAL)

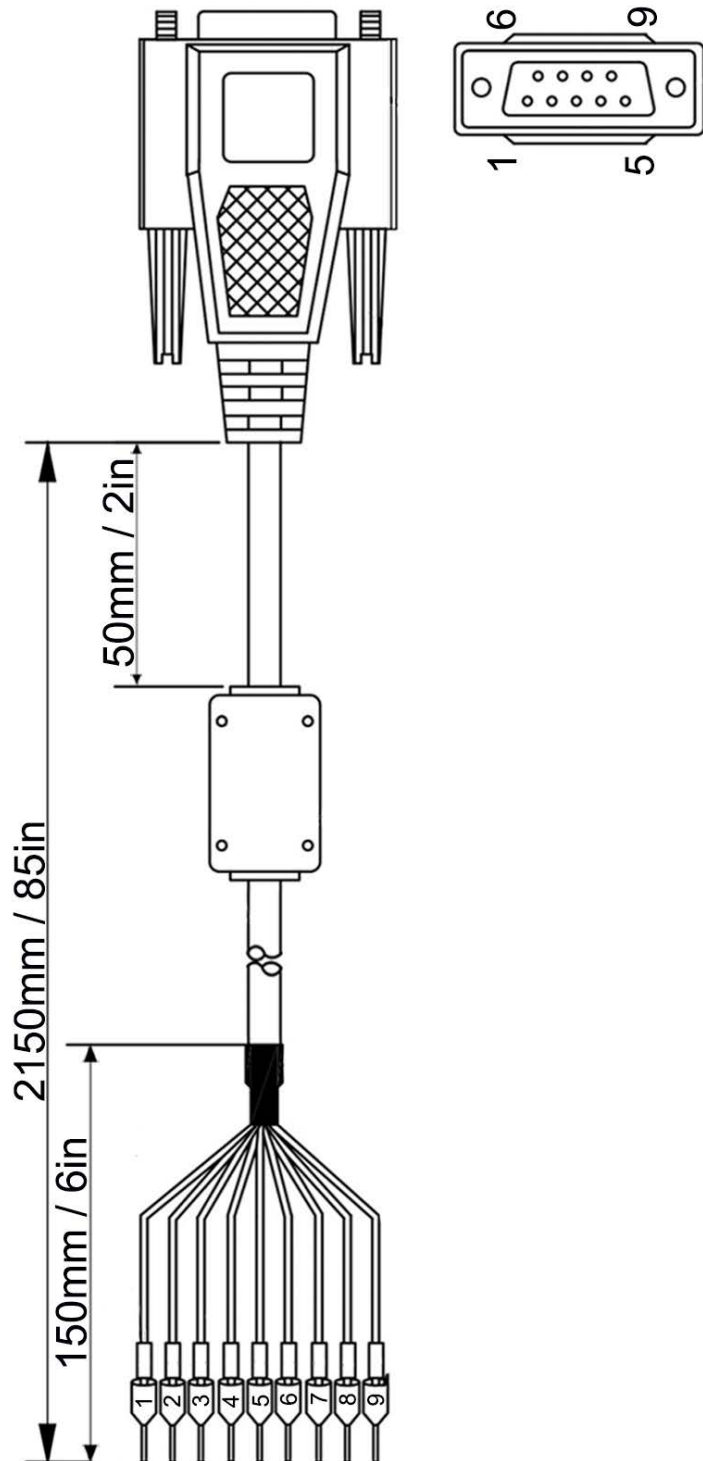

Part# VACC-009F-2E



2538 E. 54th Street
Huntington Park, CA 90255
Office: 310-689-2328
Fax: 310-689-2329
sales@marathon-power.com
info@marathon-power.com
www.marathon-power.com

Your local representative / distributor is