

Dry Controls Relay Box for Track & Sprint Series

Part Number: TASR-EXTL-01

PRODUCT INFO


The External AS-400 Relay Module converts UPS communication signals to potential-free, dry contacts for industrial control. It is designed for use with Marathon Power's Track and Sprint Series UPS. Dry contact signals and connection details for the terminal block are as follows.

UPS State		External Input	DCB LED Display			Terminal Blocks			
AC Failure	BAT Low	Shut Down	Yellow	Green	Red	1-2 PIN	2-3 PIN	4-5 PIN	5-6 PIN
Close	Close	Disable	Off	Off	Off	Close	Open	Close	Open
Open	Close	Disable	On	Off	Off	Open	Close	Close	Open
Open	Open	Disable	Off	On	Off	Open	Close	Open	Close
Close	Close	Enable	Off	Off	On	Close	Open	Close	Open


Terminal Block, Layout and Operation

NOTES:


Suitable electric wire: 22-12 AWG (IEC 2.5 mm) Contact maximum current: 10AShut down input signal (range = +5 V to +12 V)

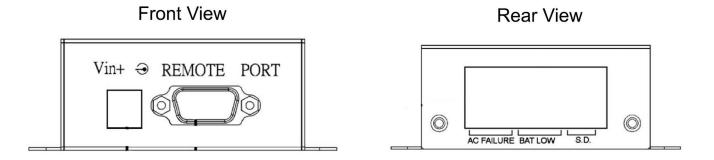





Dry Contact Pinout Information



Part Number: TASR-EXTL-01

