


WE GO THE D I S T A N C E FOR YOU

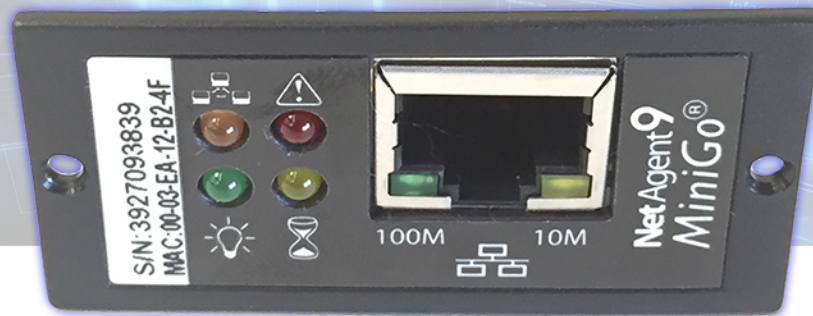

## NetAgent Mini for DIN Rail UPS

Part Number: SNMP-DX82-01

### A NEW GENERATION SNMP / WEB CARD IN A COMPACT EXTERNAL MODULE

NetAgent Mini integrates multi-network communication protocols to enable a comprehensive, easy to understand, secure remote monitoring and management for UPS and other equipment via internet.

#### Advantages

- New standard Mini dimension.
- Superior Network Response.
- Network protocols supported.
- Standard alone embedded system. No PC required.
- Multi-Network communication protocols supported.
- Multi-Language Web page supported.
- Web based access to facilitate easy monitoring and control of UPS.
- 10M/100M Fast Ethernet auto sense.

#### UPS Supported

- Support Dry Contact/Smart UPS.
- Support MegaTec/SEC protocols.
- Support Single/Three phases UPS.

#### Notifications Supported

- Support TRAP notification.
- Support SMTP Email notification without PC required.
- Support Pager notification via SNMPView.

#### LCD On Board Display (DK-530 model only)

- Network Settings (IP, Gateway, Subnet Mask).
- Input Status (Voltage, Frequency)
- Output Status (Voltage, Frequency and Loading)
- Battery Status (Voltage)
- UPS Temperature.

#### Free Bundle Software

- SNMPView: Simple NMS, supports all Windows OS.
- Multi-Mon function supported to enable monitor multiple UPS in only one screen.
- In case of power events, auto set alert through TRAP, Email and Pager notifications.
- ClientMate: SNMP unattended shutdown application for all Windows OS.
- Windows Service / Broadcast message functions supported.
- MIB file provided for compiling to NMS Internet Time Sync supported.

#### Multi-Monitoring Utility

- All SNMP compatible NMSs.
- Telnet & SNMPView in Windows.
- Browser for Web Server.

#### Network Protocols Supported

- Support Multi-Network protocols and TCP/IP apps such as, SNMP, Web Server (HTTP), Telnet, Email (SMTP), Internet Time Sync (SNTP), Modem Dial-in (PPP), Domain Name Service (DNS), DHCP, PDA, WAP/GPRS.


#### Notifications Supported

- HP OpenView
- SUN SunNet Manager
- IBM Trivoli
- Novel NMS
- MegaTec SNMPView
- Other SNMP Compatible NMS's

# NetAgent Mini Specifications



|                     |                                                                                                                                          |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| CPU                 | ARM 50 MHz 32bit                                                                                                                         |
| System Clock        | 25MHz/50MHz                                                                                                                              |
| Port                | 1 Port                                                                                                                                   |
| Flash Memory        | 1MB                                                                                                                                      |
| SDRAM               | 8MB                                                                                                                                      |
| Web Multi-Language  | Yes                                                                                                                                      |
| LED                 | 6                                                                                                                                        |
| Power Supply        | 4.5V ~ 7V DC, 250mA Max                                                                                                                  |
| Ethernet Throughput | 808 Kbytes Per Seconds                                                                                                                   |
| Ethernet Latency    | 0.89 Milliseconds                                                                                                                        |
| Operating Voltage   | 3.3 Volt                                                                                                                                 |
| Watch Dog           | Hardware Watch Dog                                                                                                                       |
| LAN interface       | 10M/ 100M UTP                                                                                                                            |
| LAN Protocol        | TCP/IP, . HTTP, SMTP, SNTP, DHCP, Telnet, BOOTP, DNS, DDNS, PPPoE, Wap, PDA browser, SNMP RFC1628 MIB, PPC MIB Ethernet Upgrade firmware |

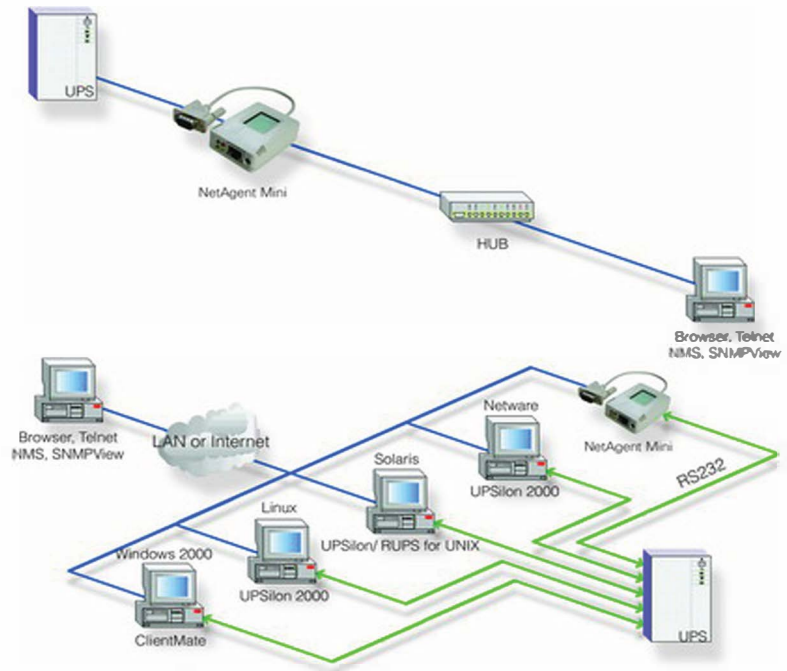

Part Number: SNMP-DX82-01