

WE GO THE DISTANCE FOR YOU



NetAgent 9 SNMP Card

Trusted & Reliable UPS Solution

Compatible with Marathon Power Traffic & Ruggedized UPS Series

Part Number SNMP-CY54-04

PRODUCT INFO

- Support advance encryption: HTTPS, SSL, SSH, SNMPv3
- Centralized UPS Monitoring & Management
- Supports UPS MIB, RFC1628, PPC MIB
- Supports centralized authentication
- Supports MODBUS TCP/IP
- Real-time UPS monitoring
- Schedule periodic UPS self-test
- Record event / data log



UPS Events	YES	NO
Schedule Shutdown Event	<input checked="" type="radio"/>	<input type="radio"/>
UPS Failure	<input checked="" type="radio"/>	<input type="radio"/>
UPS entering Test mode	<input checked="" type="radio"/>	<input type="radio"/>
UPS entering Sleeping mode	<input checked="" type="radio"/>	<input type="radio"/>
UPS entering Boost mode	<input checked="" type="radio"/>	<input type="radio"/>
UPS Load Overrun	<input checked="" type="radio"/>	<input type="radio"/>
UPS Communication Lost	<input checked="" type="radio"/>	<input type="radio"/>
Turns Off UPS	<input checked="" type="radio"/>	<input type="radio"/>
AC Power Failed	<input checked="" type="radio"/>	<input type="radio"/>
UPS Battery Low	<input checked="" type="radio"/>	<input type="radio"/>
UPS Temperature Overrun	<input checked="" type="radio"/>	<input type="radio"/>
UPS Capacity Underrun	<input checked="" type="radio"/>	<input type="radio"/>
UPS entering Bypass mode	<input checked="" type="radio"/>	<input type="radio"/>

Select All Clear All Apply


Hardware Specifications	
Watch Dog	Yes
RealTime Clock	Yes
LAN Interface	10M/100M UTP

The screenshots display the NetAgent IX web interface with the following sections:


- System Information:** Shows hardware details like Hardware Version (M7504), Firmware Version (3.4-CY54-PCM3), and System Name (V500u-1000-01).
- Configuration - Email:** A form for setting up email notifications, including email settings and account selection.
- Configuration - Network:** A form for configuring network settings such as IP Address, Subnet Mask, Gateway, and DNS servers.
- Configuration - Access Control:** A table for managing user access with columns for User Name, Password, Permission, and IP Filter.
- Configuration - MIB:** A table for configuring MIB (Management Information Base) settings, including MIB Name, Access, Community, Trap Type, Severity, and Description.
- Battery Status:** A monitoring panel showing real-time data like Temperature (21.9 °C), Battery Capacity (100%), and Battery Voltage (38.2 V).
- UPS Events:** A log of system events with columns for event name, status, and time.

Available Software

Netility is tool software that helps the user to search all the available NetAgent within network as well as to configure IP address and firmware upgrade.

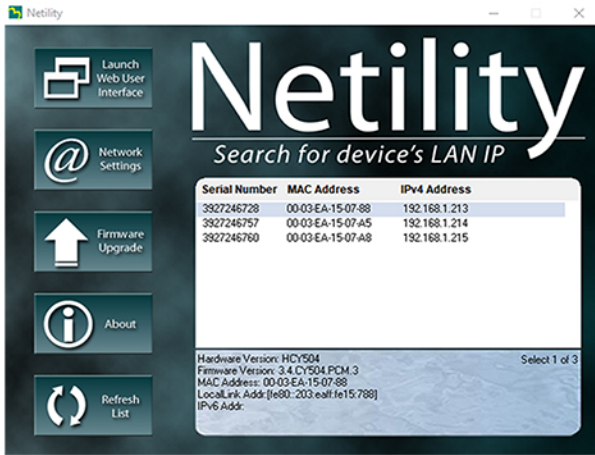

SNMPView is a NMS software to remotely monitor and control multiple UPS's with NetAgent. When an event occurs, SNMPView can be programmed to send an email or TRAP to inform the designated network manager. It can also inform the user of the UPS current condition or configuration, perform self-test, send a history file and more. Other third party NMS such as HP OpenView may also be use on by importing our product specific MIB file.

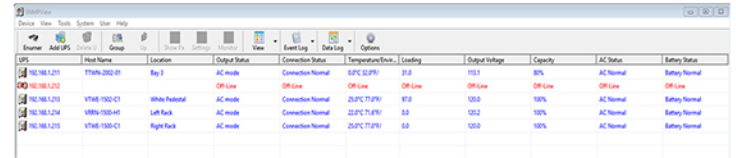


Supported LAN Protocols

TCP/IP, HTTP, HTTPS, SSL, SSH, SMTP, SNMP, DHCP, Telnet, BOOTP, DNS, DDNS, RADIUS, IPv4, IPv6

Supported MIB Objects

PPC MIB, RFC1628, SNMPv1, SNMPv2, SNMPv3

SNMP Card Installation

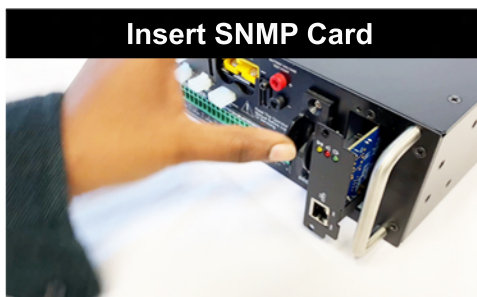

SNMP-CY54-04



2538 E. 54th Street
 Huntington Park, CA 90255
 Office: 310-689-2328
 Fax: 310-689-2329
 sales@marathon-power.com
 info@marathon-power.com
 www.marathon-power.com

Your local representative / distributor is